



PLAN VIEW

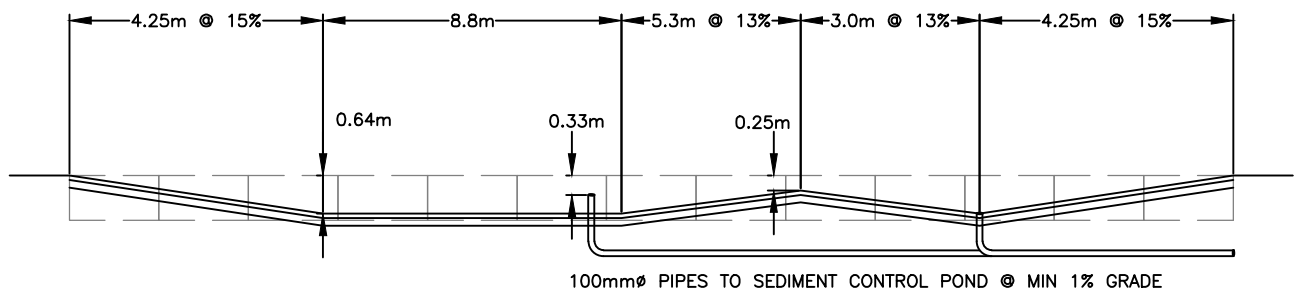

SECTION A

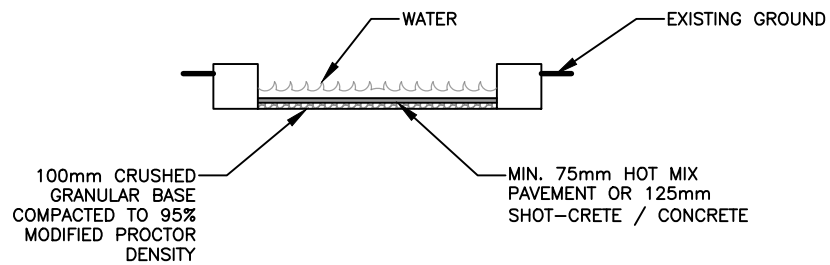

SECTION B

NOTE:

1. ALL LOCK BLOCKS AND JOINTS TO BE GROUTED TO FORM LEAK TIGHT SYSTEM
2. PROTECT DRAINS BY RECESSING LOCK BLOCKS AT LOW POINTS
3. DRAIN OPENING TO HAVE A MANUFACTURED SLOTTED DRAIN CAP
4. WHEEL WASH TO APPROVAL OF ENVIRONMENTAL SERVICES